




Manufacturers and distributors of trench shoring and shielding equipment.

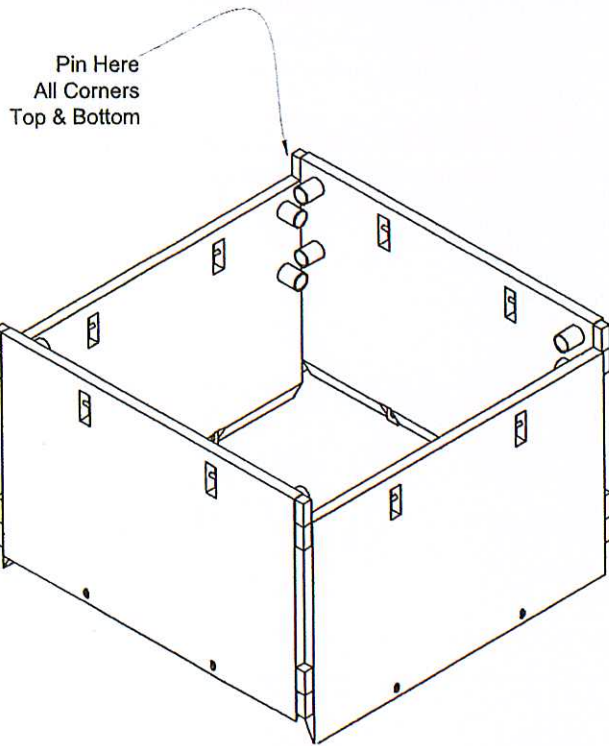

2.25" x 2.25" x 1/4"
tube
for use with
4-sided
configuration

4-sided boxes up to 24' x 24', no taller than 8' are rated to 24' deep in C-60 soils, or the rating of the shield, which ever is less.


4-sided boxes from 24' x 24' to 30' x 30', no taller than 8' are rated to 15' deep in C-60 soils, or the rating of the shield, which ever is less.

All pockets shall be 4 x 4 x 1/2" x 10" long, all stacking pins shall be 2-1/4" x 2-1/4" x 1/4" tube x 22" long

Follow all notes & limitations on the certification sheet Supplied With the Pro-Tec shield being used

A 4-way sling shall be used when lifting or moving

Caution: pinch points may occur between panels

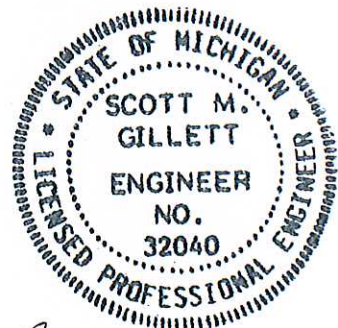

Scott M. Gillett
11/9/03
Pins + Tube Connection